




The Flooring Solutions

your color story

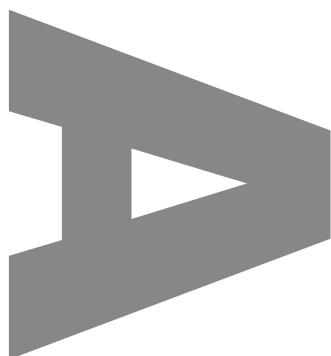


PATTERNS


50cm x 50cm


INDEX

PAGE

ALMA - 6	2
ALMA - 21	3
ALMA - 22	4
ALMA - 24	5
ALMA - 29	6
ALMA - 85	7
ALMA - 82	8
ALMA - 84	9
ALMA - 93	10
Specification	12

























ALMA-16




ALMA-21



ALMA-22



ALMA-24

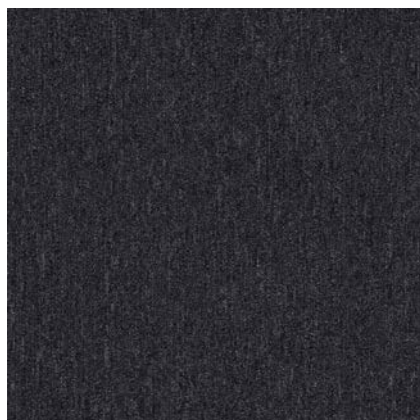

ALMA-29



ALMA-85



ALMA-82



ALMA-84




ALMA-93

Specification

Product Name	ALMA
Tufted construction	Level Loop
Fiber	100% PP
Dye method	Solution Dyed
Gauge	1/10
Tufted weight(g/m ²)	530 ± 5%
Tile size(mm)	500 x 500
Pile height(mm)	3.5 ± 0.5
Total thickness(mm)	6.5 ± 0.5
Standard Backing	Glass fiber reinforced PVC Monolithic

Recommended installation methods

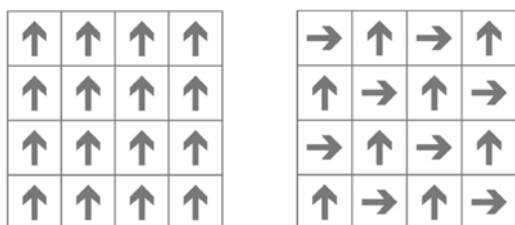

Quarter-turn



Anti-fouling



Anti-static




Environmental



Passed various tests



Fashion colors



100%B,C,F Yarn



Reduced Flammability




Isolation acoustic



Colorfast



Chair roulettes



No edge ravel



Wear resistance



Soil Resistance




Wear Warranties



Dimensional Stability



Long life-span



Easy to transport



Non-mold



The Flooring Solutions

your color story

PATTERNS

25cm x 100cm

INDEX

PAGE

Fairview - #1

02

Fairview - #2

03

Fairview - #4

04

Fairview - #1 & 7

05

Specification

06



FW #1 Herringbone



FW #2 Ashlar





FW #1 #7 Herringbone



FW #1



FW #2



FW #4



FW #7




Specifications

Construction	multi-level loop
Fiber	100% PP
Dye Method	solution dyed
Gauge	1/12"
Stitches	10 per inch
Pile Weight	20 OZ / yd ²
Pile Height	4mm±0.5mm
Total Thickness	7mm±0.5mm
Backing	PVC with fiberglass
Tile Size	25cm x 100cm

Installation Method



Ashlar



Herringbone

Performance

Flammability:	Passes (ASTM E648)
Smoke Density:	Passes (ASTM E662)
Static Propensity:	≤3.0kV (AATCC 134)
Soil & Stain Protection:	Excellent Soil Resistance
Color Fastness to Light:	5 (AATCC-16E)
Dimensional Stability:	<0.2% (AACHEN)
Hexapod:	2.5 (ASTM D5252)

Warranties

5 years limited warranty:

No more than 10% face yarn loss by weight under normal use.

Limited static warranty.

Limited delamination warranty under normal use.

KINGSTON



PATTERNS

50cm x 50cm

INDEX

PAGE

KINGSTON - 05	2
KINGSTON - 07	3
KINGSTON - 13	4
KINGSTON - 20	5
KINGSTON - 24	6
Specification	8



KINGSTON-05



KINGSTON-07



KINGSTON-13



KINGSTON-20



KINGSTON-24



KINGSTON-05



KINGSTON-07



KINGSTON-13



KINGSTON-20




KINGSTON-24

 **Cflors**
The Flooring Solutions


Specification

Product Name	KINGSTON
Tufted construction	Multi-level Loop
Fiber	100% PP
Dye method	Solution Dyed
Gauge	1/12
Tufted weight(g/m ²)	/ 570±5%
Tile size(mm)	500 x 500
Pile height(mm)	4.0 ± 0.5
Total thickness(mm)	6.5 ± 0.5
Standard Backing	Glass fiber reinforced PVC

Recommended installation methods



Monolithic



Quarter-turn



Anti-fouling



Anti-static




Environmental



Passed various tests



Fashion colors



100%B,C,F Yarn



Reduced Flammability




Isolation acoustic



Colorfast



Chair roulettes



No edge ravel



Wear resistance



Soil Resistance




Wear Warranties



Dimensional Stability



Long life-span



Easy to transport



Non-mold

 **Cflors**
The Flooring Solutions



X-TH



XH1

XH1

XH1



The Flooring Solutions

your color story

PATTERNS


25cmx100cm,50cmx50cm,60cmx60cm

In stock-50x50cm


INDEX

PAGE


XH1-A01-Quarter-turn	2
XH1-A02-Quarter-turn	3
XH1-B01-Quarter-turn	4
XH1-B02-Brick	5
XH1-B02-Quarter-turn	6
XH1-B12-Quarter-turn	7
XH1-B84-Quarter-turn	8
Specification	10




XH1-A01- Quarter-turn




XH1-A02- Quarter-turn



XH1-B01- Quarter-turn



XH1-B02 Brick



XH1-B02 Quarter-turn



XH1-B12 Quarter-turn




XH1-B84 Quarter-turn



XH1-A01



XH1A02

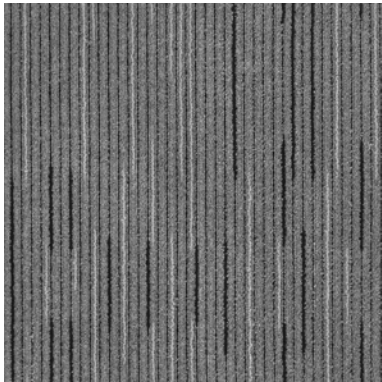

XH1-B01



XH1-B02



XH1-B12



XH1-B84

Specification

Product Name	XH1-A
Product Code	XH1-A
Tufted construction	Multi-level Loop
Fiber	100% PP
Dye method	Solution Dyed
Gauge	1/10
Tufted weight(g/m²)	460 ± 5%
Tile size(mm)	500 x 500
Pile height(mm)	3.5 ± 0.5
Total thickness(mm)	5.5 ± 0.5
Standard Backing	Glass fiber reinforced PVC
Flammability	GB8624-2012 B1(C)
Area of Use	Commercial- Heavy Duty
Antistatic performance	ISO 6356:2012≤2.0 kV
Dimensional Stability	QB/T 2755-2005≤0.2%
Colour Fastness	QB/T 2755-2005 ≥4-5

Specification

Product Name	XH1-B
Product Code	XH1-B
Tufted construction	Multi-level Loop
Fiber	100% PP
Dye method	Solution Dyed
Gauge	1/12
Tufted weight(g/m²)	490 ± 5%
Tile size(mm)	500 x 500
Pile height(mm)	4.0 ± 0.5
Total thickness(mm)	6.0 ± 0.5
Standard Backing	Glass fiber reinforced PVC
Flammability	GB8624-2012 B1(C)
Area of Use	Commercial- Heavy Duty
Antistatic performance	ISO 6356:2012≤2.0 kV
Dimensional Stability	QB/T 2755-2005≤0.2%
Colour Fastness	QB/T 2755-2005 ≥4-5



Recommended installation methods

